

TATSUO

CRAWLER EXCAVATOR

JP75-8



AZARINDO NUSANTARA ADITYA TRIPA

www.tatsuo.co.id | sales@tatsuo.co.id

SURABAYA

Margomulyo Indah Blok G-4
031 738 5050



BALI

Jl. Bypass Ngurah Rai 276E
0361 4919255 - 0812 3663 0123

JAKARTA

Duta Indah Karya Blok A No 1
Jl. Daan Mogot Raya KM 13
021 543 32557 - 0812 9955 9902


Main Dimensions			Unit
A	Wheelbase	mm	2200
B	Total length of track	mm	2750
C	Platform ground clearance	mm	720
D	Platform back turning radius	mm	1570
E	Chassis width	mm	2150
F	Track width	mm	450
G	Chassis ground clearance	mm	345
H	Track height	mm	650
I	Transport length	mm	5830
J	Height of cab	mm	2640
K	Transport width	mm	2160

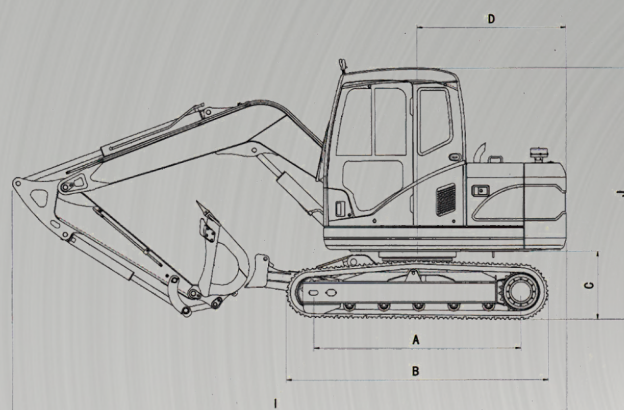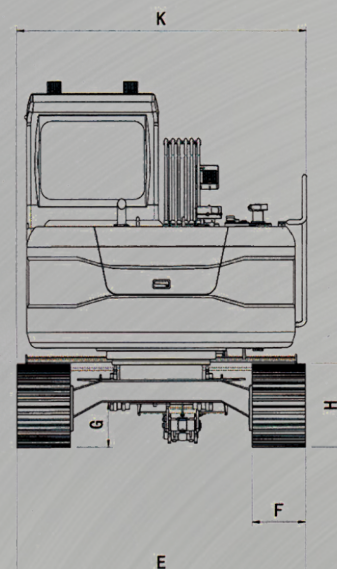

Main dimensions schematic diagram

Specification	Unit	
Operation weigh	kg	7300
Bucket capacity	m3	0.3
Model	Yanmar 4TNV98-ZCSLK	
Rated power	kW/rpm	46.3kW/2200
Traveling speed (height/low)	km/h	3.7/2.3
Rotating speed	rpm	9
Climbing ability	/	35°
Ground pressure	kPa	39
Bucket digging dorce	kN	52
Stick digging force	kN	38

Operating range		Unit	
A	Max. digging radius on ground	mm	6240
B	Max. digging depth	mm	3650
C	Max. digging height	mm	6320
D	Max. dumping height	mm	4440
E	Max. vertical digging depth	mm	3260
F	Min. rotation radius	mm	2180
G	Max. upgrade height of dozer blade	mm	335
H	Maax. Digging deptg of doer blade	mm	440

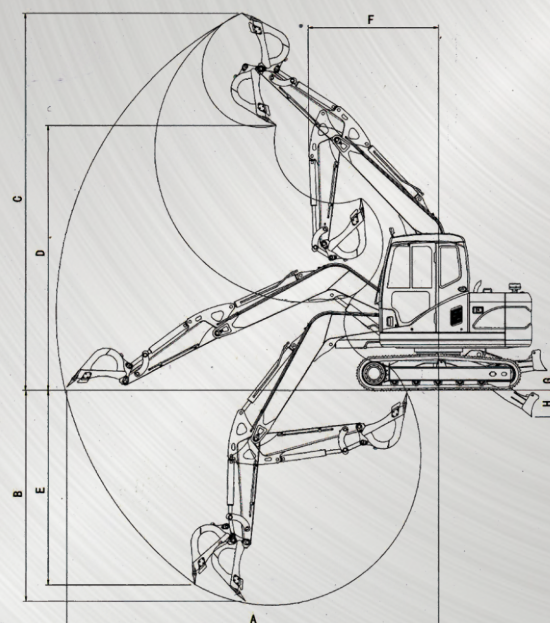

Working range schematic diagram